

Model: GL12-150(12V 150Ah)

GL Series



Legacy Canadian products designed in Canada, assembled in China.

VLRA High Rate Discharge Battery

- **Connecting To Legacy**
- 🔎 Laval-Quebec-Canada
- 🔎 Beirut-Lebanon
- 🔎 Hongkong-China
- **Q** www.connectinglegacy.com


Introduction	GL12-150(12V 150Ah)		,
Length	483±2mm (19.0 inches)		
Width	170±2mm (6.69 inches)	400	
Height	241±2mm (9.49 inches)		
Total Height	242±2mm (9.53 inches)	i i	241
Weight	Approx. 43.0 Kg (Tolerance±5%)		
Terminal	Default F12(M8), F5(M8) Optional, Value: 10~12N*m		
Container Material	A.B.S. UL94-HB, <ul94-v0 optional=""></ul94-v0>		
Design Life	12 years		
Application	UPS/EPS,Telecom,Power grid,Medical equiment,Emergency light and Security system etc.	384	\square
	Structure: Compact design of shorter internal connectors among cells for lower I.R.		F12 Terminal
	Plate: Pasted flat type with patent high rate formula of AM supports stable performance du discharge.	uring high current	GL12-150 Dimension
Features	Separator: Improved AGM seperator increases deep cycle life.		
	Safety Valve:Flame arrester/filter is equipped with safety valve system.		
	Design and manufacture with DIN standards by Legacy team, for heavy load discharge appli	cations.	

Parameters	GL12-150 (12V 150Ah)	
Cell Per Unit	6	
Voltage Per Unit	12V	
Nominal Capacity	150Ah @10hour-rate to 1.80V per cell @25°C	
Internal Resistance	≤4.4 mΩ(Full Charge Condition @25°C)	
Max. Discharge Current	1500A (5 sec)	
Max. Charging Current	45.0A	
Short Circuit Current	2700A	A A A A A A A A A A A A A A A A A A A
Reference Capacity	C3:112.5Ah C5:127.5Ah C10: 150.0Ah C20: 159.0Ah	
Floating Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell	
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell	
Normal Operating Temperature Range	25°C±5°C	GL12-150 Imagine
Operating Temperature Range	Discharge and Storage : -20°C~60°C Charge: 0°C~50°C	
Self Discharge	Monthly Self-discharge ratio is less than 3% at 25° C	
Note	Legacy GL batteries can be stored for up to 6 months at $25^{\circ}C$ and recharging is recommended. Please charged batteries before using.	

connecting	to	
<u>ξ</u> Ε(Э <i>Л</i>	CY

F.V/TIME	10MIN	15MIN	30MIN	1HR	2HR	3 H R	4HR	5HR	8HR	10HR	20HR
1.60V	329.5	264.2	162.6	91.6	54.6	42.3	33.3	28.3	19.0	15.8	8.28
1.65V	311.4	252.6	156.1	88.5	52.9	41.0	32.4	27.6	18.8	15.6	8.15
1.70V	286.6	236.6	149.2	85.6	51.1	39.9	31.5	26.8	18.5	15.4	8.05
1.75V	262.4	220.2	142.6	82.5	49.3	38.7	30.7	26.2	18.3	15.2	7.95
1.80V	237.5	203.3	136.3	79.3	47.6	37.5	29.8	25.5	17.9	15.0	7.87
1.85V	194.1	168.7	117.4	71.2	43.6	34.7	27.7	23.8	16.8	14.1	7.47


F.V/TIME	10MIN	15MIN	30MIN	1HR	2HR	3 H R	4HR	5HR	8 H R	10HR	20HR
1.60V	560.1	461.9	295.4	172.2	103.5	80.8	63.8	54.5	37.1	31.1	16.3
1.65V	539.4	448.1	286.5	167.3	100.7	78.6	62.3	53.3	36.8	30.8	16.1
1.70V	505.7	426.0	276.6	162.8	97.9	76.8	60.9	52.1	36.3	30.3	15.9
1.75V	471.3	402.2	267.1	157.8	94.9	74.9	59.5	51.0	35.9	30.0	15.7
1.80V	434.0	376.6	257.9	152.7	92.0	72.8	58.0	49.9	35.4	29.6	15.6
1.85V	361.0	317.0	224.3	137.8	84.7	67.6	54.2	46.6	33.3	27.9	14.8



Model: GL12-150


Constant Power Discharge W/Cell (@ 77°F/25°C)



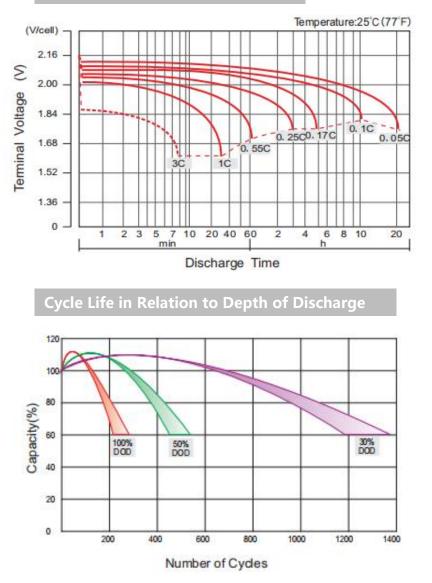


Charge Characteristics Curve For Standby Use(IU)



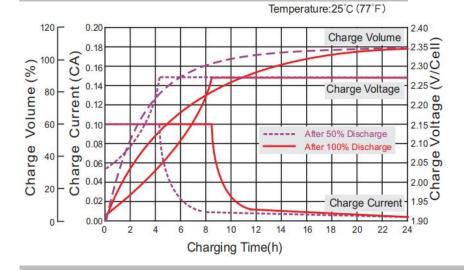


Relationship Between Charging Voltage and Temperture

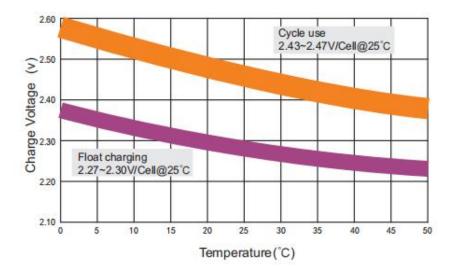


Note: The above datas are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Legacy reserves the right to explain and update the lastest information.





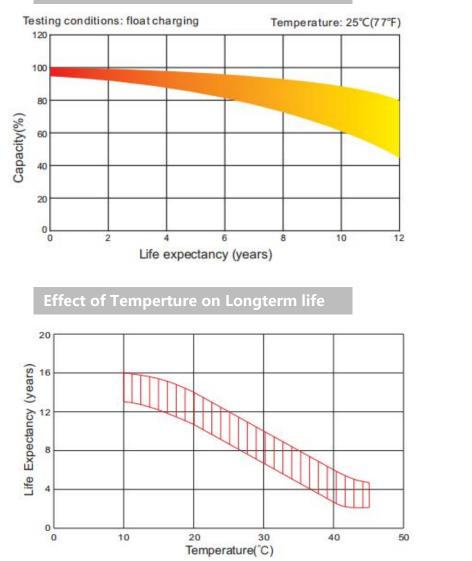

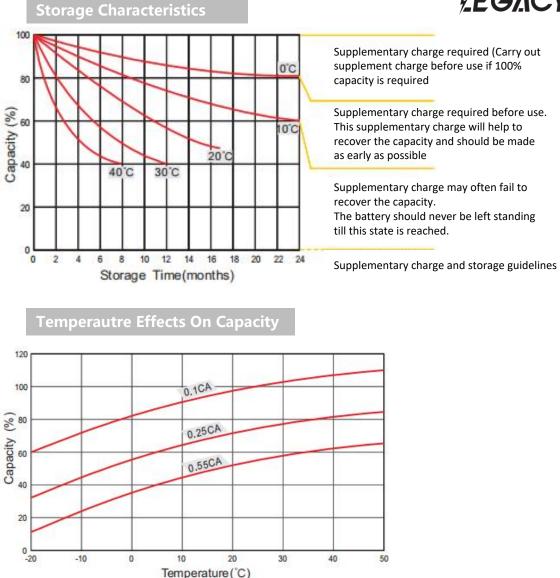

Note: The above datas are average values, and can be obtained within 3 charge/ discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Legacy reserves the right to explain and update the lastest information.



LET'S DEVELOP TRUST AND BUSINESS

Connecting To Legacy